









Anti-glare Reduce specularity




3840X2160



backlight life >50,000 hours



Viewing angle 178°

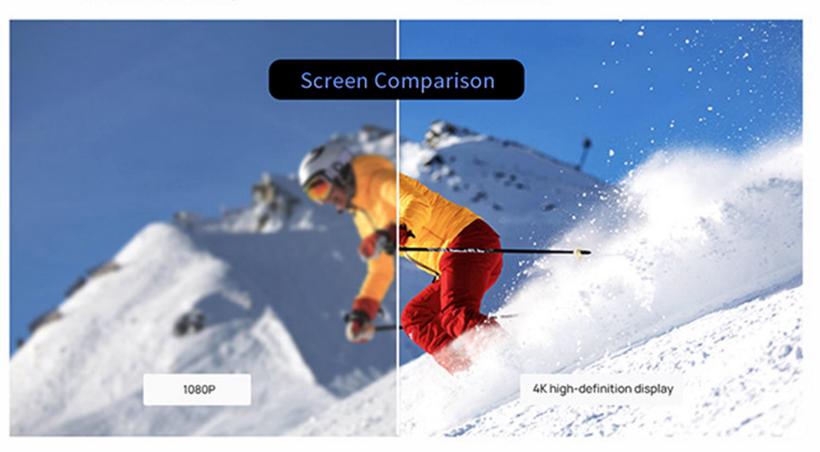








| Model | | | LT65311D2 | |
|----------------------------------|--|-------------------|--|---|
| Screen Size (Diagonal) | 65 inch | Built-in Software | EZ Write 6.0, Web & Live for White boarding in Web & Windows, | |
| Refreshing Frequency | 60Hz | | Duit-iii Soitware | InstaShare 2 |
| Viewing Angle | Horizontal: 178° & Vertical: 178° | | Additional Features | Ambient Light Sensor, Low Blue Light and Flicker Free, AMS for Account management, DMS for Device management, Floating Tool for Quick access tool, X-Sign Broadcast for |
| Brightness | 450 nits | | | |
| Germ-Resistant Screen/Pen | Yes, Nano-ionic silver | | | |
| Display Resolution | 4K (3,840 x 2,160) | Number of Touch | Broadcast system, Dustproof, Eye Care Up to 40 Point Multi-touch | |
| Anti-Glare Glass | Yes | | Sound Channel & Speaker | 20W x 2 |
| Tempered Glass | 9H tempered 3.2 mm Thickness | Input/ Output | 20W X Z | |
| Contrast Ratio (Typical) | 1200:1 | | VGA Input x1, HDMI1 3× HDMI 2.0, Display Port 1× 1.2, RJ45 x 1, PC Audio × 1, Mic × 1 Earphone × 1 | |
| Dynamic Contrast Ratio (Typical) | 50000:1 | | | |
| Back Light Life (Typical) | 50,000 hours | | Audio 3.5mm x 1, SPDIF x 1.USB-USB (Type A)- 2× 2.0 + 5× 3.2 Gen1, USB (Type C)-x 2 (USB 3.0 x1 supports speeds up to 5 Gbit/s for data and video transfer, touch and 65W power charging; USB 3.0 x1 supports speeds up to 5 Gbit/s for data and video | |
| Response Time | 8ms | | | |
| Operating System | Android 13.0 | | | |
| Built-in Microphone | X8 noise and echo cancellation | | | |
| Camera | 4K, 4-Omni Microphone, 4x Zoom, Al Auto Framing, Voice Tracking | | | transfer), USB (Type B)-3 × 3. |
| | | | Power Requirements | 220 -240 VAC 50/60Hz |
| Android System Memory | 8GB | OPS | Intel core i5 11th Gen, Windows 10/11 | |
| Android Storage | 32GB | | 512GB SSD, 8GB DDR4 RAM dual | |
| Android CPU | Arm Cortex- A73 × 4 + A53 × 4 | | channel (2400/2666MHz) | |
| Android GPU | G52 MP8 | Accessories | Remote Control with Battery, Power Cord, 2x Touch pen, Quick Start Guide, Touch Cable (USB to USB), HDMI cable, VGA (D-sub 15pin) Cable, Type- C Cable, Wall Mount | |
| Connectivity | Wi-Fi 6 Bluetooth 5.2 | | | |



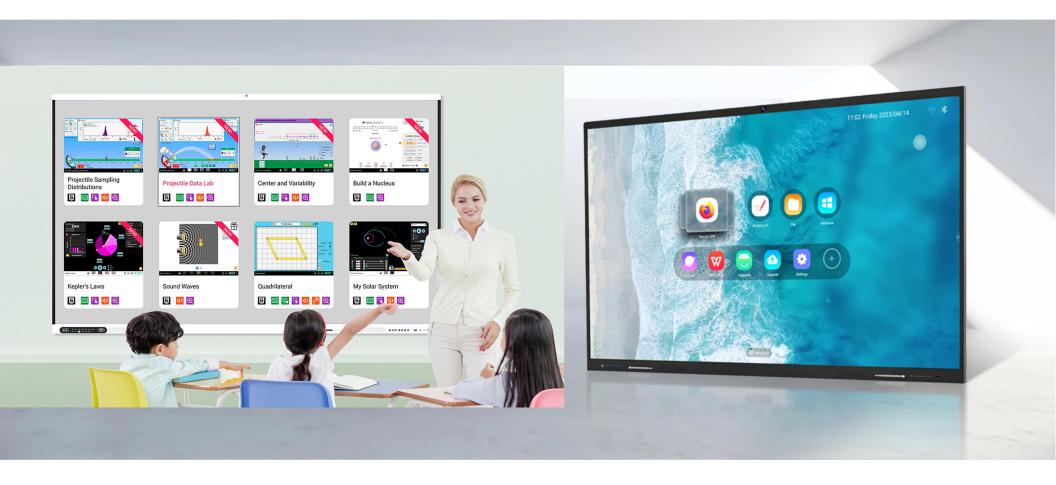

Manufacturer:



ITC Vanke Center, No.1 Changqing South Road, Dongguan, Guangdong, China

Website: www.riotouch.com