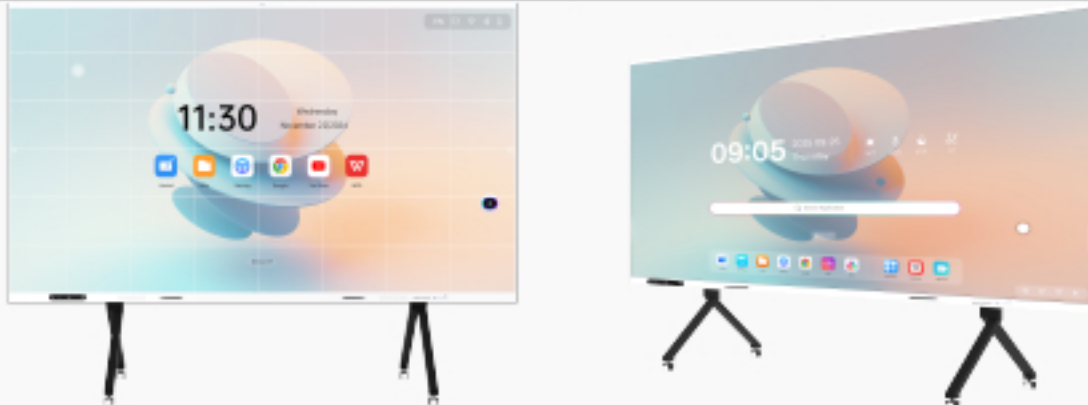


Parameter Details

Model			LF 108RK3588	LF 136RK3588	LF 163RK3588
Product picture					
Display specification					
Diagonal display size			108(inch)	136(inch)	163(inch)
Bezel color	Aluminum frame(White color)		√	√	√
Panel type	LED		√	√	√
Active area (mm)			2400*1350	3000*1687.5	3600*2025
Resolution	1920*1080 /60hz		√	√	√
Pixel pitch			P1.25	P1.25	P1.25
Screen Technology	COB		√	√	√
Aspect Ratio	16:9		√	√	√
Contrast Ratio			√	√	√
Brightness	350cd/m2 (optional450cd/m2)		√	√	√
Color depth	1.07 billion colors		√	√	√
Viewing angle	178°		√	√	√
Lifespan	50,000 hours		√	√	√
Touch Type					
Touch Technology	IR touch		√	√	√
Multi Touch	Max 10 points		√	√	√
Touch accuracy	2 mm		√	√	√
Automatic calibration	是		√	√	√
Anti-light	是		√	√	√
Minimum object size	7mm		√	√	√
Single point response speed	10ms		√	√	√
Supported Operating Systems	Windows 7/8/10/11; Android; Mac; Linux; Chrome OS		√	√	√

Sound				
Front Speakers	15W*2	√	√	√
Total Power Amplifiers	≧30w	√	√	√
Microphone (option)				
Type	Wide-area microphones	√	√	√
Number of Microphones	8	√	√	√
Auto switch (Windows/Central)	Yes	√	√	√
camera (option)				
Number of images	4800M (AI)	√	√	√
Maximum resolution and frame rate	8000*6000@5fps 4200*3120@20fps 3840*1920@30fps	√	√	√
FOV(field of view)	D=119 H=97 V=74	√	√	√
Front Side Connections				
Front Ports	USB 3.0*3;USB-B 3.0*1;HDMI*1;Type-c*1(full function)			
Front Keys	Power on/off; Signal source; Setting; ECO; Menu; Volume down; Volume up			
Bottom Side Connections				
USB DEBUG	1	√	√	√
RJ45	2	√	√	√
HDMI OUT	1	√	√	√
RS232	1	√	√	√
MIC IN	1	√	√	√
Earphone	1	√	√	√
SPDIF OUT	1	√	√	√
HDMI IN	2	√	√	√
Touch USB	1	√	√	√
Android USB3.0	2	√	√	√
Full Source Sharing USB3.0	1	√	√	√

Riotouch Central				
Android Version	13	√	√	√
Chip	RK3588	√	√	√
CPU	quad-core Cortex-A76 and quad-core Cortex-A55, 2.2~ 2.4GHz	√	√	√
GPU	Mali-G610 MC4	√	√	√
NPU	6T	√	√	√
RAM	4G、8G、16G	√	√	√
Flash	32G、128G、256G	√	√	√
Compliant with	Windows; Mac; Linux; Chrome OS	√	√	√
Over-the-Air Updates (OTA)	YES	√	√	√
Light Sensor	YES	√	√	√
General Information				
Power Supply	~ 100-240 V (50/60Hz)	√	√	√
Standby Energy Consumption	≤ 0.5 Watt	√	√	√
Net Weight	(KG±2)			
Gross Weight	(KG±2)			
Screen Dimensions	(WxDxH)	2435.68*45*1464.28	3035.68*45*1081.78	3635.68*45*2139.28
Dimensions Package	(WxDxH)	1841*1362*192	3087*169*108	
VESA Standard	(mm)			
Certifications	CE: EMC + LVD / RoHS / REACH / FCC/CCC	√	√	√
Warranty	ONE year for the whole product and THREE years for touch parts by default. (can be extended, it's for an option)	√	√	√
Environmental conditions				
Operating Temperature	0℃ - 40℃/32 - 100 °F	√	√	√
Storage Temperature	-20℃ - 60℃/-4 - 140 °F	√	√	√
Storage Humidity	10 % - 90 %	√	√	√
Usage Humidity	10 % - 90 %	√	√	√
Accessories				
Accessories	WIFI antenna*2pcs;\ Remote control *1pcs, 3m power cord *1pcs, 1.5m HDMI cable *1pcs, 1.5m USB touch cable *1pcs; wall mount kit			

LED 108"/ 136"/ 163"

Smart LED Conferencing Display



On - Site Translation

40 - Point Touch



AI Voice Control

**4 Way Walkie -
Talkie Translation**

Product Description



High Temperature Resistance and Low Temperature Resistance

